

ROC800-Series Communication Modules

Communication modules add communication ports to a ROC800-Series Remote Operations Controller (ROC800). The central processor unit (CPU) of a ROC800 provides three built-in communication ports. You can add up to three communication modules which result in a maximum of six communication ports per ROC800.

A variety of communication modules are available including:

- RS-232 module
- RS-485 module
- Dial-up modem module
- Network Radio Module (NRM)

Note: Refer to *ROC800:NRM*, the product data sheet for the ROC800-Series Network Radio Module, for information on this communication module.

RS-232 Module

The RS-232 module provides one EIA-232 (RS-232) port for point-to-point asynchronous serial communication. EIA-232 (RS-232) communications commonly provide the physical interface for connecting serial devices, such as gas chromatographs and radios. The RS-232 communications module provides essential hand-shaking lines required for radio communications, such as Data Terminal Ready (DTR) and Request to Send (RTS).

RS-485 Module

The RS-485 module provides one EIA-422/485 (RS-422/485) port for asynchronous serial communications for multi-drop units on a serial network over distances of up to 1220 meters (4000 feet) using inexpensive twisted-pair cables. When the module is set to EIA-485 (RS-485) mode, it allows multiple-point communications. When set to EIA-422 (RS-422) mode, it allows long distance point-to-point communications. Modules are set via hardware jumpers.

The RS-485 module has four jumpers to select between:

- EIA-422 (RS-422) mode, 4-wire
- EIA-485 (RS-485) mode, 2-wire
- Switch termination resistors in or out

Dial-Up Modem Module

The Dial-Up Modem module provides the ROC800 with the ability to communicate over a Public-Switched Telephone Network (PSTN) at up to 14.4 kbps using V.42 bis, MNP2-4 and MNP10 error correction.

Compatibility and Installation

Communication modules can be installed in module slot 1, 2, or 3 of a ROC800-Series unit with a Series 1 or Series 2 CPU. Install or remove modules from the module slots at any time by removing the two captive screws accessible from the front of the unit.


RS-232 and RS-485 modules are hot-swappable, meaning you can remove the module and install another module of the same kind while under power. The module acquires the previous module's configuration.

RS-232 and RS-485 modules are hot-pluggable, meaning you may install them directly into unused module slots under power. The modules require configuration. The modules are also self-identifying, meaning ROCLINK™ 800 Configuration Software automatically recognizes them.

Dial-up modem modules may only be inserted when the ROC800-Series unit is powered down.

Each communication module is isolated from other modules, the backplane, power, and other signals, with the exception of the RS-232 module. The field interface protects the electronics in the isolated modules. Each module reduces the effect of noise on communication errors through filtering.


All modules have removable terminal blocks for convenient wiring and servicing. The terminal blocks can accommodate a wide range of wire gauges from 12 to 22 American Wire Gauge (AWG).



RS-485 Communications Module

ROC800-Series RS-232 Module

Field Wiring Terminals

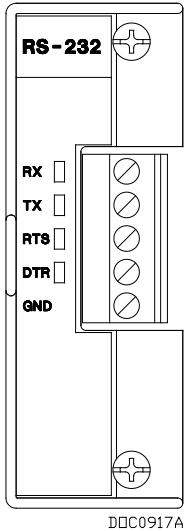

Terminal	Label	Definition
1	RX	Receive
2	TX	Transmit
3	RTS	Request To Send
4	DTR	Data Terminal Ready
5	GND	Ground

Communications

Type	Single, meets EIA-232C and RS-232C standard
Data Rate	115.2 kbps maximum
Over-Voltage Protection	±25 Vdc, continuous on any terminal

Power

Consumption	Main power supply loading at the Battery Terminals (at 12.0 Vdc)	Typical	4 mA
	Additional loading that may apply	Per Active LED	1.5 mA

Physical

Dimensions	26 mm W by 75 mm H by 133 mm D (1.03 in. W by 2.96 in. H by 5.24 in. D)		
Weight	47.6 g (1.68 oz)		
Wiring	12 to 22 American Wire Gauge (AWG) at the removable terminal block		
LEDs	RX	Receive	
	TX	Transmit	
	RTS	Request To Send	
	DTR	Data Terminal Ready	

Environmental


Same as the ROC800-Series unit in which it is installed

Approvals

Same as the ROC800-Series unit in which it is installed

ROC800-Series RS-485 Module

Field Wiring Terminals

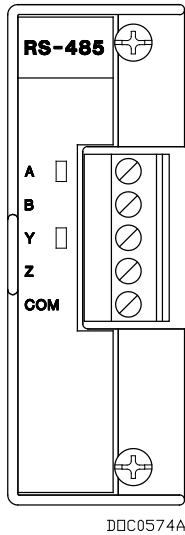

EIA-422 (RS-422)

Terminal	Label	Definition
1	A	Receive +
2	B	Receive -
3	Y	Transmit +
4	Z	Transmit -
5	COM	Floating EIA-422 Common

EIA-485 (RS-485)

Terminal	Label	Definition
1	A	Receive/Transmit +
2	B	Receive/Transmit -
3	Y	No Connect
4	Z	No Connect
5	COM	Floating EIA-485 Common

Communications

Type	Single, half-duplex, meets EIA-422 (RS-422) and EIA-485 (RS-485) standards, jumper-selectable		
Data Rate	115.2 kbps maximum		
Output-Voltage Protection	±14 Vdc, continuous on any terminal		
Termination Resistor	Jumper-selectable		

Power

Consumption	Main power supply loading at the Battery Terminals (at 12.0 Vdc)	Typical	112 mA
	Additional loading that may apply	Per Active LED	1.5 mA
Isolation	Field to Logic	2500 Vdc, 1 minute min.	
	Field to Power	2500 Vdc, 1 minute min.	
	Module to Module	2500 Vdc, 1 minute min.	

Physical

Dimensions	26 mm W by 75 mm H by 133 mm D (1.03 in. W by 2.96 in. H by 5.24 in. D)		
Weight	49.9 g (1.76 oz)		
Wiring	12 to 22 American Wire Gauge (AWG) at the removable terminal block		
LEDs	Upper	On when receiving	
	Lower	On when transmitting	

Environmental


Same as the ROC800-Series unit in which it is installed			
---	--	--	--

Approvals

Same as the ROC800-Series unit in which it is installed

ROC800-Series Dial-Up Modem Module

Field Wiring Terminals

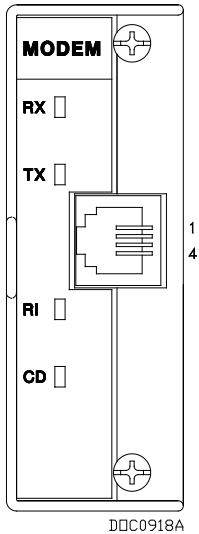

Terminal	Definition
1	Not Used
2	Ring
3	Tip
4	Not Used

Communications

Type	Single, 14.4 K bps with V.42 bis
Mode	2-wire for dial-up PSTN (Bell 212A and 103 compatible)
Connector	RJ-11 type
Data Rate	14.4 kbps max.
Error Correction	V.42, MNP2-4 and MNP10
Certification	FCC Part 68 approved
Ring Voltage Detected	38 to 150 RMS, type B ringer
Ring Frequency Detected	15.3 to 68 Hz, type B ringer
Data Transmit Level	-12 to -9.0 dBm, 10.5 typical
DTMF Transmit Level	-2.5 to 0 dBm, average over 3 second interval
Surge Protection	Conforms to FCC Part 68
Over-Voltage Protection	±14 Vdc, continuous on any terminal

Power

Consumption	Main power supply loading at the Battery Terminals (at 12.0 Vdc)	No Connection (on hook)	95 mA
-------------	--	-------------------------	-------

	Additional loading that may apply	Telephone Loop Current (off hook)	20 to 100 mA
		Per Active LED	1.5 mA
Isolation	Field to Logic	2500 Vdc, 1 minute min.	
	Field to Power	2500 Vdc, 1 minute min.	
	Module to Module	2500 Vdc, 1 minute min.	

Physical

Dimensions	26 mm W by 75 mm H by 133 mm D (1.03 in. W by 2.96 in. H by 5.24 in. D)		
Weight	113.4 g (4.0 oz)		
Wiring	RJ-11 socket		
LEDs	TX	Transmit	
	RX	Receive	
	RI	Ring	
	CD	Carrier Detect	

Environmental

Same as the ROC800-Series unit in which it is installed

Approvals

Same as the ROC800-Series unit in which it is installed

Headquarters:

Emerson Process Management

Remote Automation Solutions
6005 Rogerdale Road
Houston, TX 77072 U.S.A.
T +1 281 879 2699 | F +1 281 988 4445
www.EmersonProcess.com/Remote

Europe:

Emerson Process Management

Remote Automation Solutions
Unit 8, Waterfront Business Park
Dudley Road, Brierly Hill
Dudley UK DY5 1LX
T +44 1384 487200 | F +44 1384 487258
www.EmersonProcess.com/Remote

North American/Latin America:

Emerson Process Management

Remote Automation Solutions
6005 Rogerdale Road
Houston TX USA 77072
T +1 281 879 2699 | F +1 281 988 4445
www.EmersonProcess.com/Remote

Middle East/Africa:

Emerson Process Management

Remote Automation Solutions
Emerson FZE
P.O. Box 17033
Jebel Ali Free Zone – South 2
Dubai U.A.E.
T +971 4 8118100 | F +971 4 8865465
www.EmersonProcess.com/Remote

Asia-Pacific:

Emerson Process Management

Remote Automation Solutions
1 Pandan Crescent
Singapore 128461
T +65 6777 8211 | F +65 6777 0947
www.EmersonProcess.com/Remote

© 2002-2013 Remote Automation Solutions, a business unit of Emerson Process Management. All rights reserved.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions, a business unit of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow, Helicoid, OpenEnterprise, and METCO are trademarks of Remote Automation Solutions. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. Remote Automation Solutions reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by Remote Automation Solutions' terms and conditions which are available upon request. Remote Automation Solutions does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Remote Automation Solutions product remains solely with the purchaser and end-user.