

Probe Mounting Bracket

The advantage of external mount probes is that the probes are accessible while the machine is running. If external mounting is not possible, then internal mount is an option. This bracket facilitates the internal mount design.

The internal mount brackets are complete with M5 x 35 mm mounting screws and lock washers. The bracket is designed so a lock nut is not required to secure the probe.

Brackets are available for the following transducer threads:


- M6 x 0.5 (PR 6422)
- M10 x 1.0 (PR 6423)
- M18 x 1.5 (PR 6424 and PR 6425)
- 1/4" – 28 UNF – 2A (PR 6422)
- 3/8" – 24 UNF – 2A (PR 6423)



- Easy mount design
- Allows adjustment of initial gap
- Proven design for precise transducer mounting
- Complete with screws and lock washers
- Probe mounting brackets for use with sensors PR 6422, PR 6423, PR 6424, PR 6425

Technical Data	
Bracket	Aluminum, AL K3
Screws	Stainless steel, DIN 912
Lock Washers	2.041, DIN 463
Net Weight	100 g (3.53 oz)
Gross Weight	150 g (5.29 oz)
Packaging Volume	1.5 dm ³ (0.053 ft ³)
Accessories	2 screws M5 x 35 mm (.20 x 1.38 in) 2 screws M5 x 40 mm (PMB 022) (.20 x 1.57 in) 2 lock washers

Dimensions

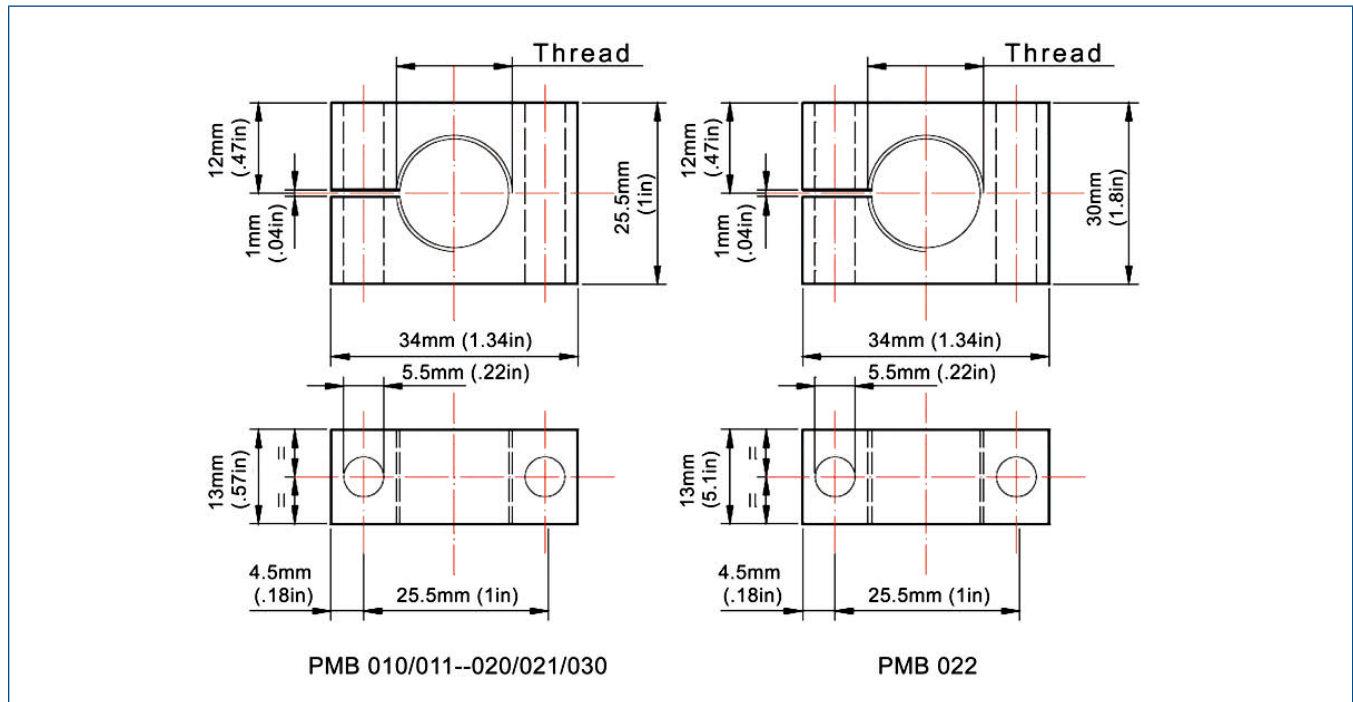

Ordering Information

Model Number	Product Description
PMB 010	M 6 x 0,5 for PR 6422/0x
PMB 020	M10 x 1,0 for PR 6423/0x
PMB 030	M18 x 1,5 for PR 6424 and PR 6425
PMB 011	1/4"-28UNF-2A for PR 6422/1x
PMB 021	3/8"-24UNF-2A for PR 6423/1x
PMB 010	M10 x 1,0 for PR 6422/0x

©2018, Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. The AMS logo is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while diligent efforts were made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Emerson
Reliability Solutions
 835 Innovation Drive
 Knoxville, TN 37932 USA
 ☎ +1 865 675 2400

🌐 www.emerson.com/ams